




Before you order our kit or begin construction, obtain a building permit. If additional documents are required contact Richard@barnkits.com.

CAMBRIDGE ELEVATION

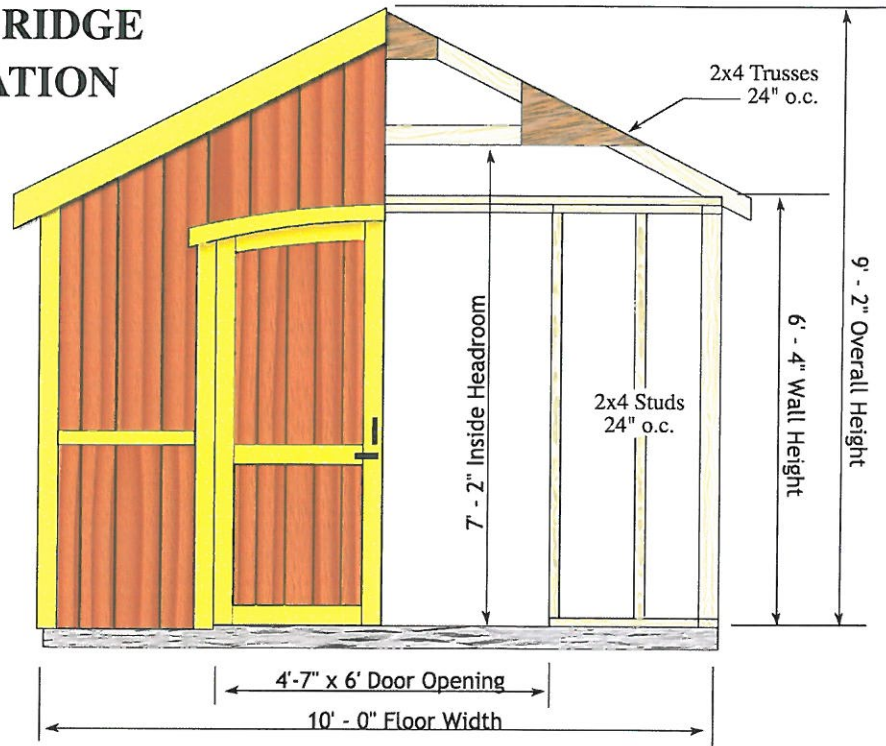

Foundation Size

10'x12' Building	10' - 0" x 12' - 0"
10'x16' Building	10' - 0" x 16' - 0"
10'x20' Building	10' - 0" x 20' - 0"

Wall Framing: Constructed from 2x4 pre-cut wall studs spaced 24" on center between top, bottom and tie plates.



Pocket Doors: Pre-built 2x4 frame covered with LP 'Smart Panel' primed siding. White pine trim, *not painted*, installed over siding.

Siding: Louisiana-Pacific 'Smart Panel' primed 8" o.c. groove with 50 year warranty, 5 year labor replacement

Roof System: 2x4 trusses spaced 24" on center, (40 psf ground snow load, 90 mph wind load). 7/16" OSB roof sheathing. *Shingles by owner.*

Exterior Trim: White pine trim for corners, door, gable trim and front and sidewall fascia.

Hardware: Nails for all framing, metal hurricane hangers for trusses. Heavy duty aluminum track, decorative door handles and lockable door latch.

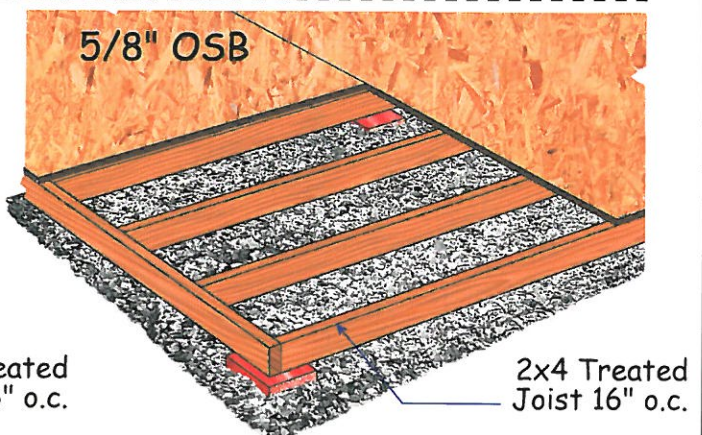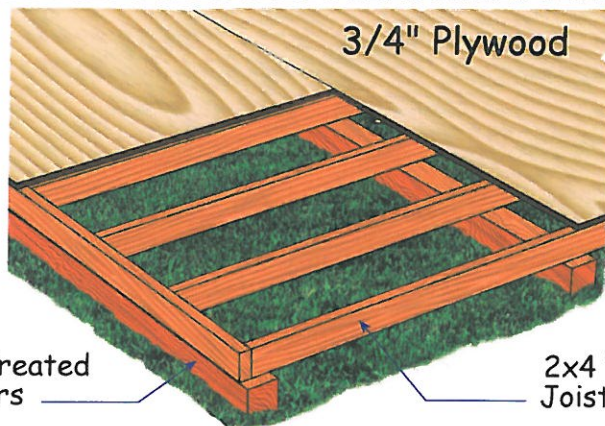

Deluxe Floor: 4x4 treated runners can be installed directly on the grass. The runners elevate the floor providing air flow under the floor eliminating moisture. 8' and 10' wide floors have three runners, 12' wide floor have four. The floor covering is 3/4" plywood.

Standard Floor: This floor system is best installed over an existing foundation, cement slab, blacktop or gravel base. Bricks or patio stones can be used to level the 2x4 frame. The floor covering is 5/8" OSB (oriented strand board).

